


REVISIONS				
REV	DESCRIPTION	DRAWN	APP.	APP.
NC				

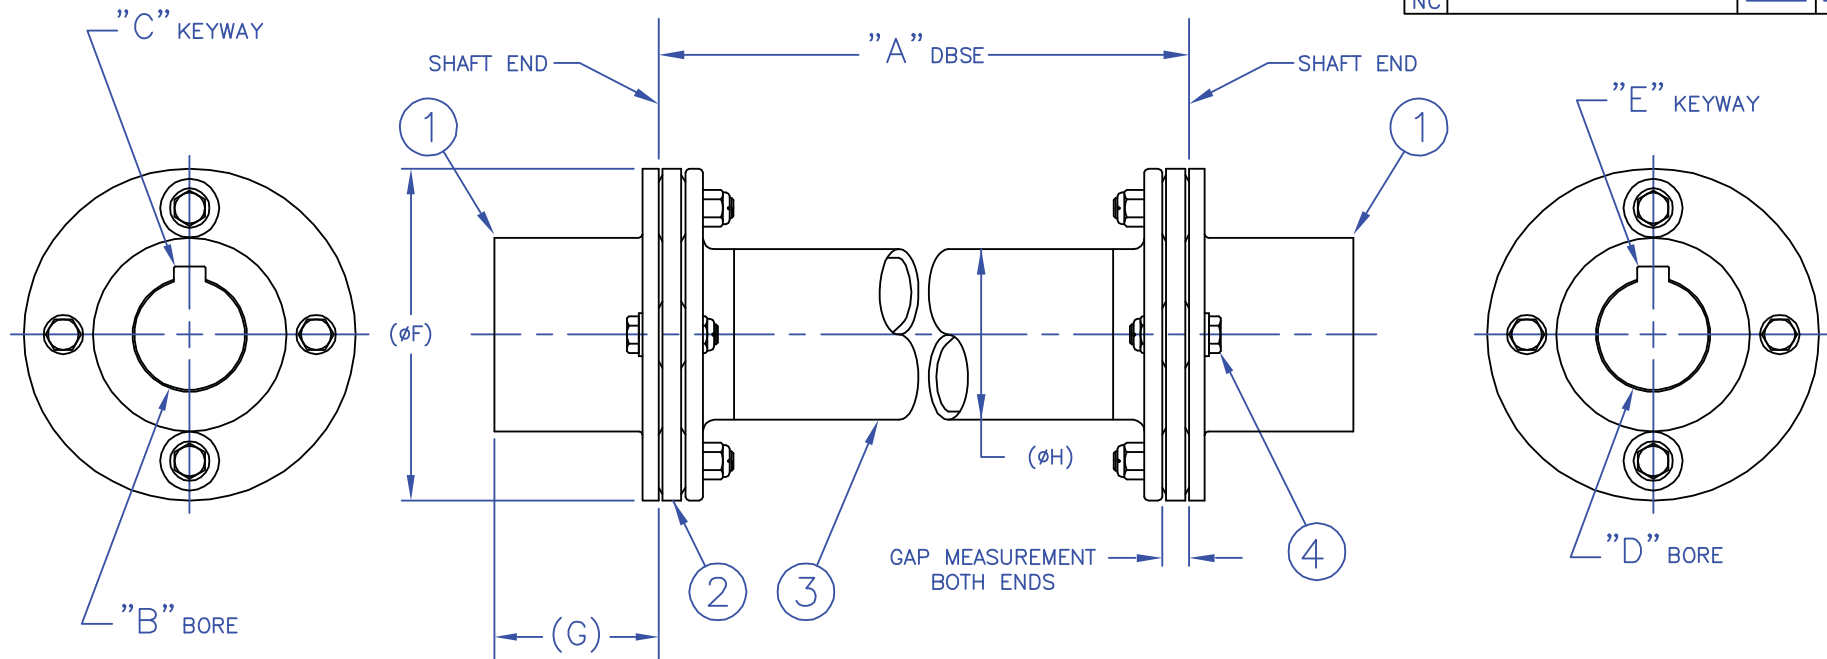

CODE	HDWR	MAT'L
S	316 S.S.	✓

FIGURE 1.

4	2	KIT, HARDWARE
3	1	SPACER
2	2	FLEX ELEMENT
1	2	HUB
DET. NO.	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	1,510mm
MOTOR	B BORE	50mm
	C KEYWAY	14 x 9mm
GEAR	D BORE	1.499in
	E KEYWAY	3/8 x 3/8in
HUB	F HUB OD	5.25in
	G LENGTH	1.81in
	H TUBE OD	2.75in

FIGURE 2.

Models: 350.275 / 375.275

CUSTOMER: I.T.C Co., Ltd

LOCATION:

HORSEPOWER: 40 HP

RPM: 1,750 rpm

MAX. CONTINUOUS TORQUE: LB-IN

PEAK OVERLOAD TORQUE: LB-IN

COUPLING MISALIGNMENT: 1°/ELEMENT

END FLOAT: ± INCH

COUPLING WEIGHT:

COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.	
TOLERANCES:	XX = ±0.030	DRAWN:	
FRACTIONS:	±1/16 XX = ±0.010	CHECK:	
ANGLES:	±1/2° XXX = ±0.005	GRP LDR:	
FINISHED SURFACES:	125 MICROINCHES	STRESS:	
REF:	MIL STD. 10	PROJ ENGR:	
WELDS:		PROG MGR:	
FILLET:		QC ENGR:	
REF:	AWS A.20-58	SAFETY:	
BREAK ALL SHARP CORNERS 0.010		PROD MGR:	

ADDAX, INC. LINCOLN, NE

LRF 350.275-SS

SIZE	CODE IDENT. NO.	DRAWING NO.
A		
SCALE: NONE	PROJ	SHEET OF