


REVISIONS				
REV	DESCRIPTION	DRAWN	APP.	APP.
NC				

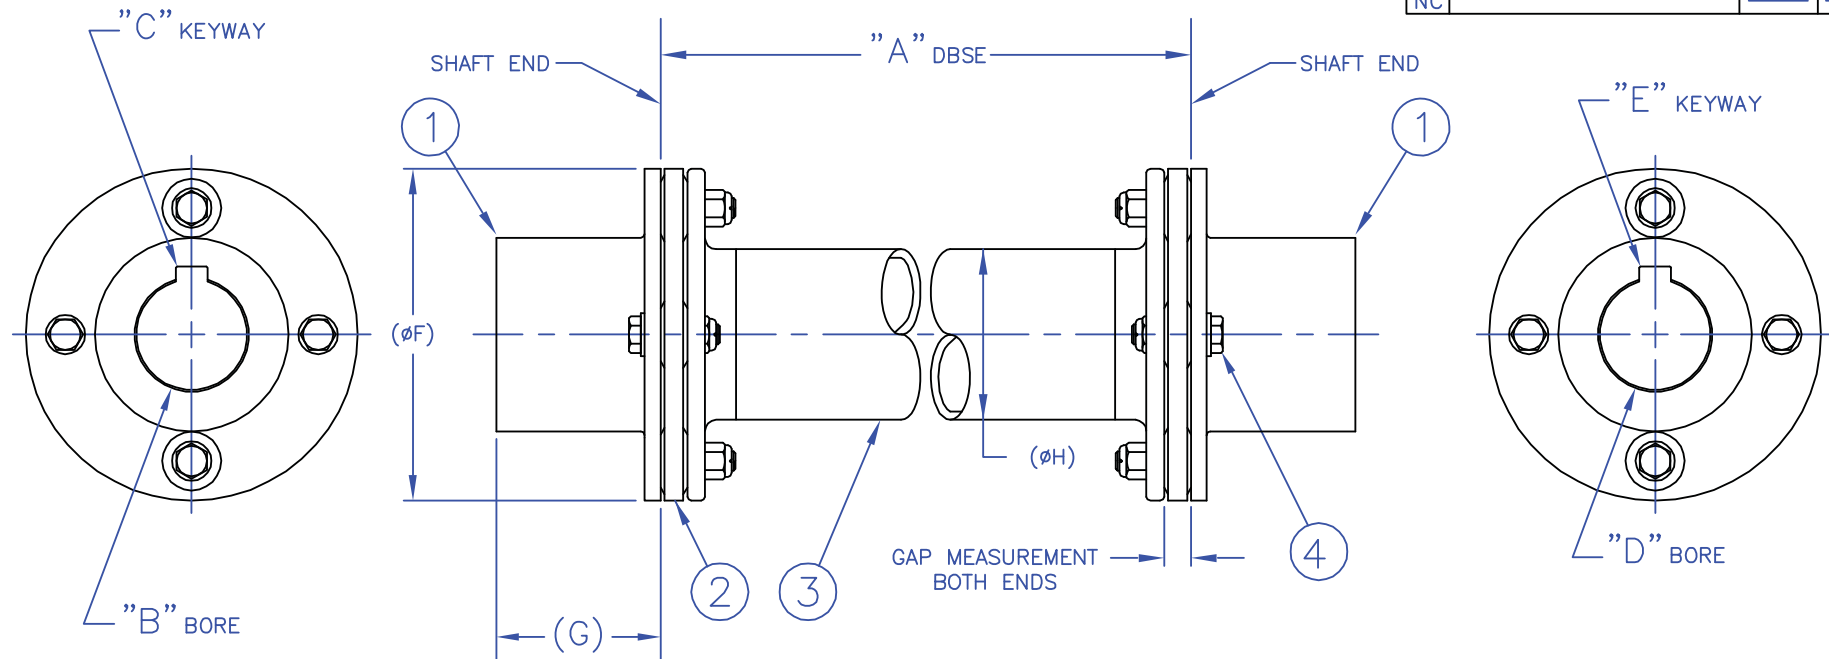

CODE	HDWR	MAT'L
S	316 S.S.	✓

FIGURE 1.

4	2	KIT, HARDWARE
3	1	SPACER
2	2	FLEX ELEMENT
1	2	HUB
DET. NO	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	1,580 mm
MOTOR	B BORE	48 mm
	C KEYWAY	14 x 9 mm
GEAR	D BORE	1.499 Inch
	E KEYWAY	3/8 x 3/8 Inch
HUB	F HUB OD	5.25 Inch
	G LENGTH	1.81 Inch
	H TUBE OD	2.75 Inch

FIGURE 2.

Models: 350.275 / 375.275

CUSTOMER: Seojin Ins-Cool Co., Ltd
LOCATION: for Indonesia, PT Smelting Pjt
HORSEPOWER: 40 HP
RPM: 1,480 RPM
MAX. CONTINUOUS TORQUE: LB-IN
PEAK OVERLOAD TORQUE: LB-IN
COUPLING MISALIGNMENT: 1°/ELEMENT
END FLOAT: ± INCH
COUPLING WEIGHT:
COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.	
TOLERANCES:	XX = ±0.030	DRAWN:	
FRACTIONS:	±1/16 XX = ±0.010	CHECK:	
ANGLES:	±1/2° XXX = ±0.005	GRP LDR:	
FINISHED SURFACES:	125 MICROINCHES	STRESS:	
REF: MIL STD. 10		PROJ ENGR:	
WELDS:		PROG MGR:	
FILLET		QC ENGR:	
REF: AWS A.20-58		SAFETY:	
BREAK ALL SHARP CORNERS 0.010		PROD MGR:	

ADDAX, INC. LINCOLN, NE

LRF 375.275-SS

SIZE	CODE IDENT. NO.	DRAWING NO.
A		
SCALE: NONE	PROJ	SHEET OF