


REVISIONS					
REV	DESCRIPTION			DRAWN	APP.
NC	INIT.	REL.	PER ECO NO.		

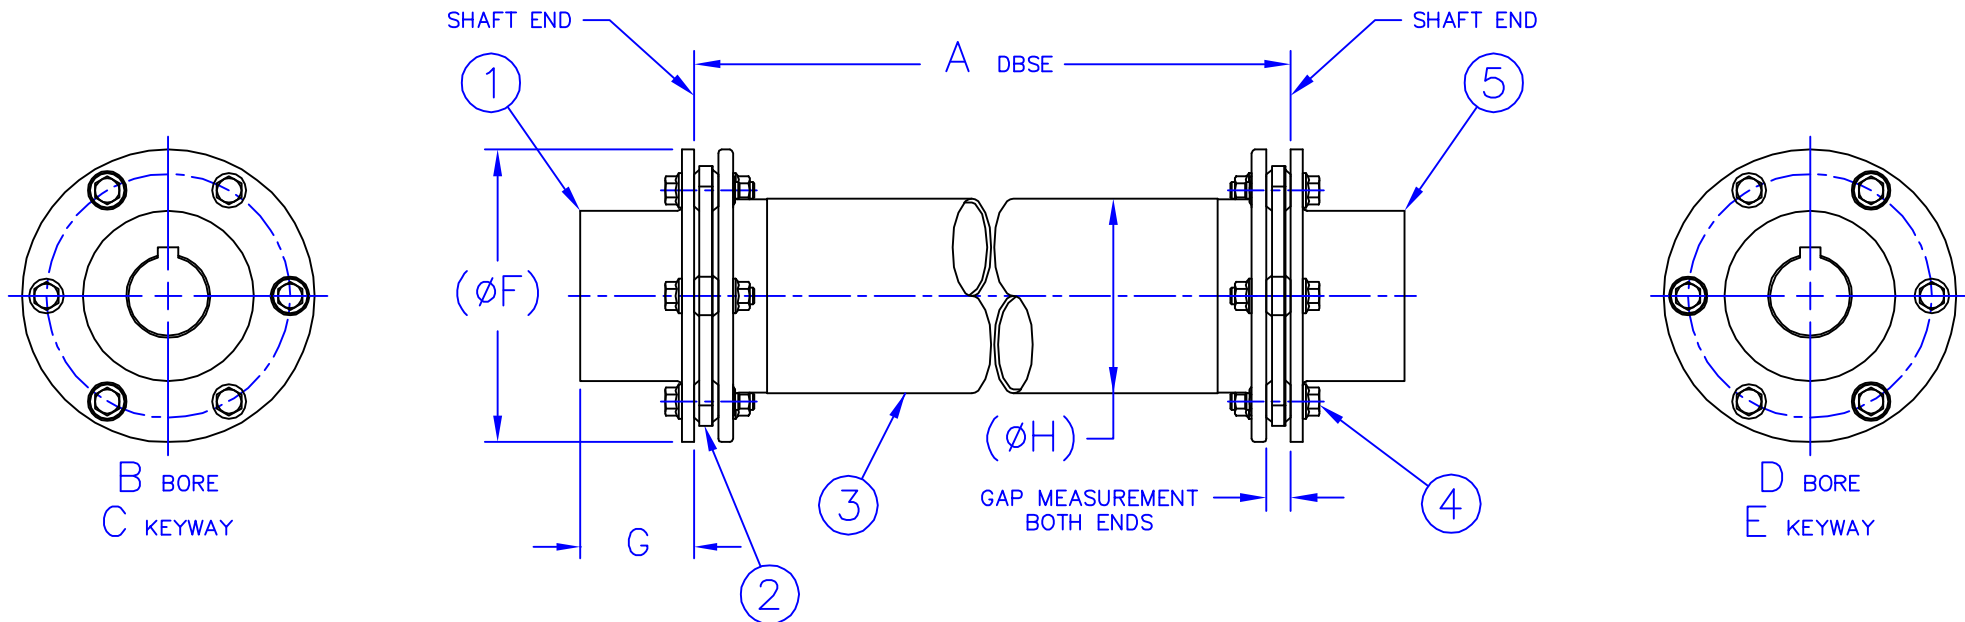

CODE	HDWR	MAT'L
M	MONEL	
S	316 S.S.	✓

FIGURE 1.

5	1	HUB
4	2	HARDWARE, KIT
3	1	SPACER
2	2	FLEX ELEMENT
1	1	HUB
DET. NO	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	2900.00 mm
MOTOR	B BORE	65 mm
	C KEYWAY	18 x 11 mm
GEAR	D BORE	50 mm
	E KEYWAY	14 x 9 mm
HUB	F HUB OD	5.25 Inch
	G LENGTH	2.60 Inch
	H TUBE OD	2.75 Inch

FIGURE 2.

Models: 450.275 / 485.338 / 650.425 / 850.625

CUSTOMER: Daeil Aqua Co., Ltd
LOCATION:
HORSEPOWER: 55 KW
RPM: 1780 rpm
MAX. CONTINUOUS TORQUE: LB-IN
PEAK OVERLOAD TORQUE: LB-IN
COUPLING MISALIGNMENT: 1°/ELEMENT
END FLOAT: ± INCH
COUPLING WEIGHT:
COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.		ADDAX, INC. LINCOLN, NE	
TOLERANCES:	X.X = ±0.030	DRAWN:		LRX 450.275-SS	
FRACTIONS:	±1/16 X.XX = ±0.010	CHECK:			
ANGLES:	±1/2° X.XXX = ±0.005	GRP LDR:		DRAWING NO.	
FINISHED SURFACES:	125 MICROINCHES	STRESS:		SIZE CODE IDENT. NO.	
REF: MIL STD. 10	125/	PROJ ENGR:		A	
WELDS:		PROG MGR:		SCALE	
FILLET		QC ENGR:		PROJ	
REF: AWS A.20-58		SAFETY:		SHEET	
BREAK ALL SHARP CORNERS 0.010		PROD MGR:		OF	