


REVISIONS				
REV	DESCRIPTION	DRAWN	APP.	APP.
NC	INIT. REL. PER ECO NO.			

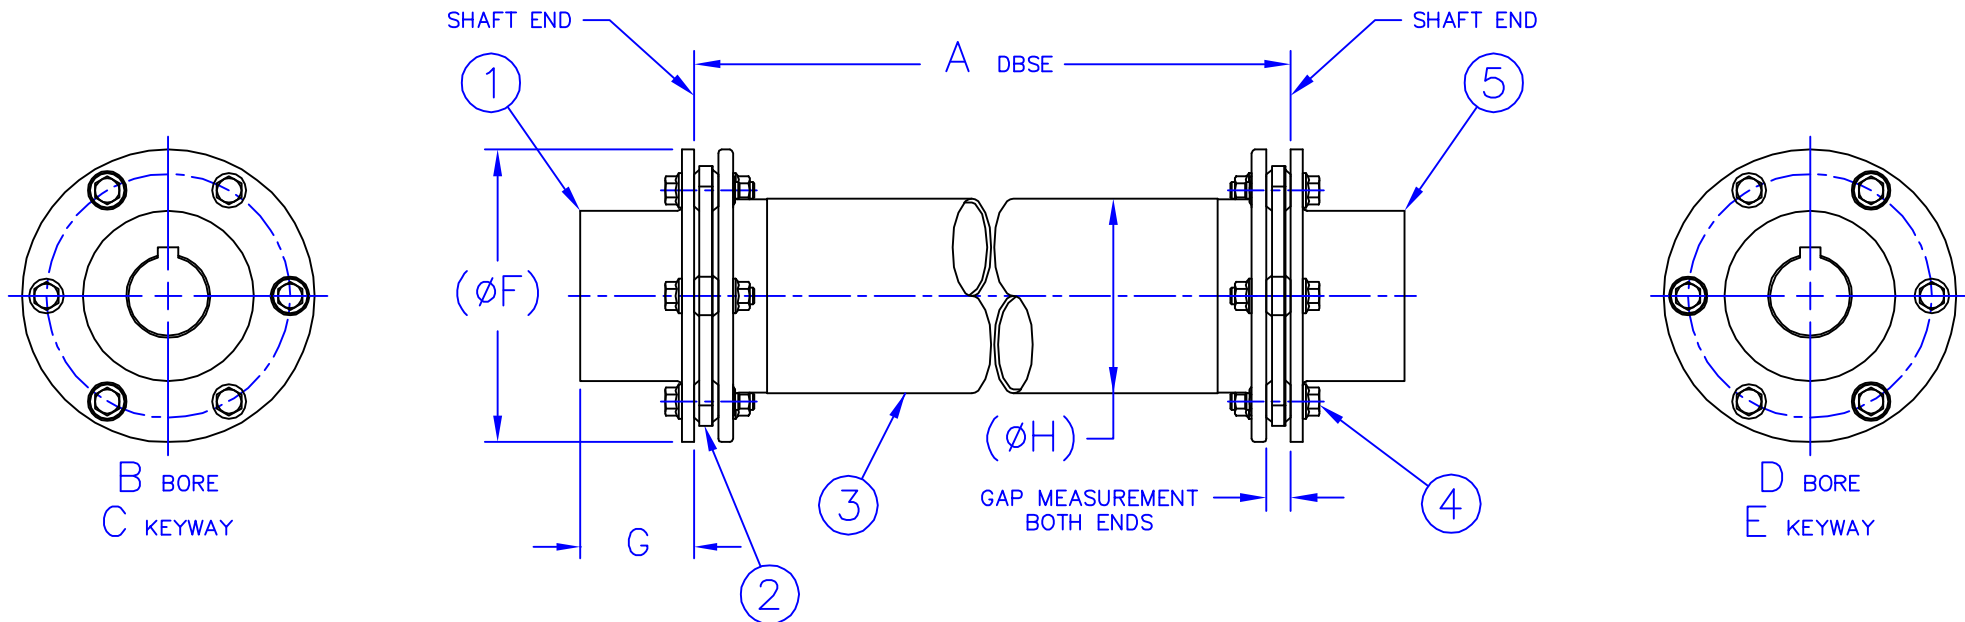

CODE	HDWR	MAT'L
M	MONEL	
S	316 S.S.	✓

FIGURE 1.

5	1	HUB
4	2	HARDWARE, KIT
3	1	SPACER
2	2	FLEX ELEMENT
1	1	HUB
DET. NO	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	3,202.00 mm
MOTOR	B BORE	60mm
	C KEYWAY	15 x 10 mm
GEAR	D BORE	1.875 Inch
	E KEYWAY	3/8 x 3/8 Inch
HUB	F HUB OD	6.00 Inch
	G LENGTH	2.50 Inch
	H TUBE OD	3.38 Inch

FIGURE 2.

Models: 450.275 / 485.338 / 650.425 / 850.625

CUSTOMER: Terra Cooling Industries Sdn. Bhd.
LOCATION:
HORSEPOWER: 100 HP
RPM: 1475 rpm
MAX. CONTINUOUS TORQUE: LB-IN
PEAK OVERLOAD TORQUE: LB-IN
COUPLING MISALIGNMENT: 1°/ELEMENT
END FLOAT: ± INCH
COUPLING WEIGHT:
COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.		ADDAX, INC. LINCOLN, NE	
TOLERANCES:	X.X = ±0.030	DRAWN:		LRR 485.338-SS	
FRACTIONS:	±1/16 X.XX = ±0.010	CHECK:			
ANGLES:	±1/2° X.XXX = ±0.005	GRP LDR:		DRAWING NO.	
FINISHED SURFACES:	125 MICROINCHES	STRESS:			
REF:	MIL STD. 10	PROJ ENGR:		DRAWING NO.	
WELDS:		PROG MGR:			
FILLET		QC ENGR:		DRAWING NO.	
REF:	AWS A.20-58	SAFETY:			
BREAK ALL SHARP CORNERS 0.010		PROD MGR:		SCALE	PROJ SHEET OF