


REVISIONS				
REV	DESCRIPTION	DRAWN	APP.	APP.
NC	INIT. REL. PER ECO NO.			

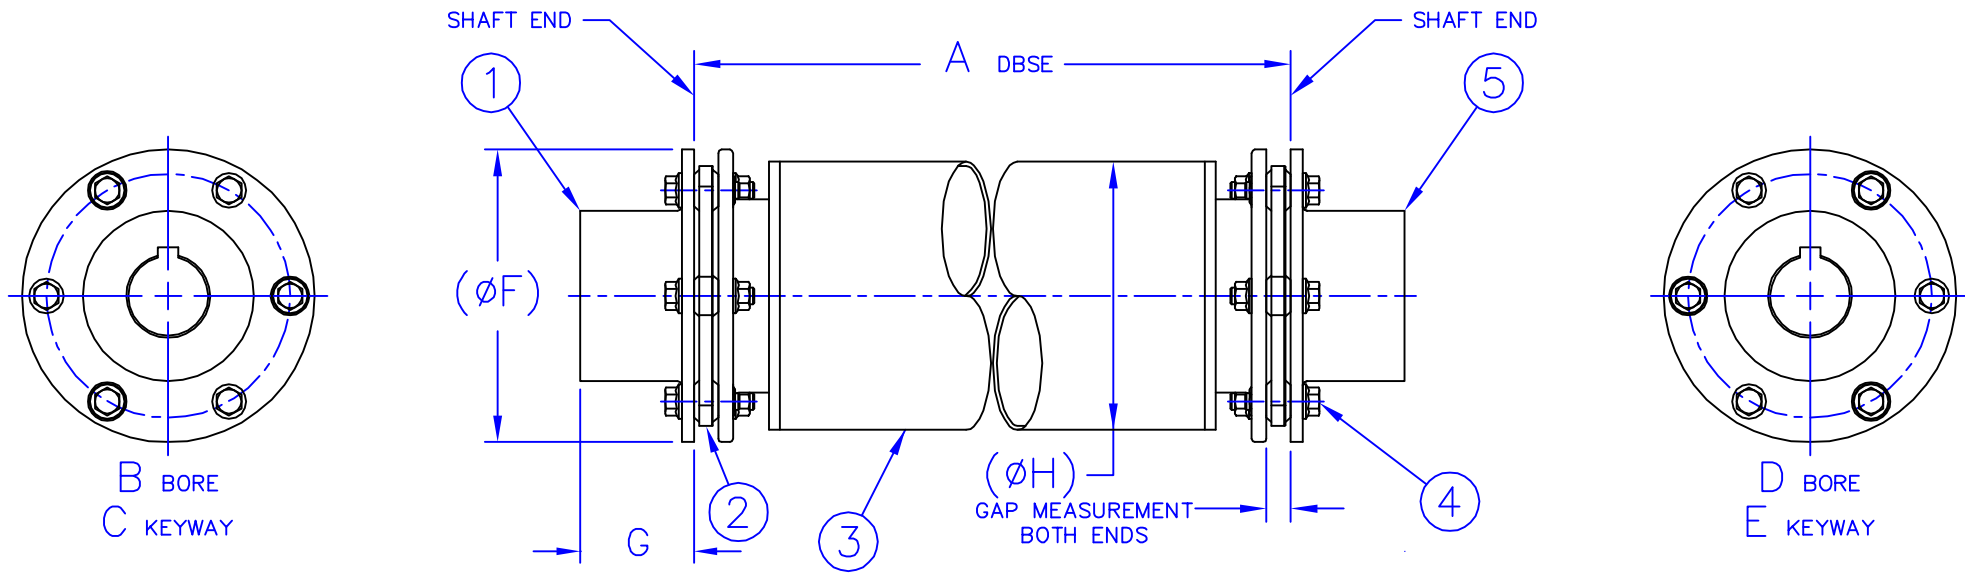

CODE	HDWR	MAT'L
M	MONEL	
S	316 S.S.	✓

FIGURE 1.

5	1	HUB
4	2	HARDWARE, KIT
3	1	SPACER
2	2	FLEX ELEMENT
1	1	HUB
DET. NO	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	3400.0 mm
	B BORE	85mm
MOTOR	C KEYWAY	22 x 14 mm
	D BORE	1.874 Inch
GEAR	E KEYWAY	3/8 x 3/8 Inch
	F HUB OD	6.00 Inch
HUB	G LENGTH	2.75 Inch
	H TUBE OD	4.25 Inch

FIGURE 2.

Models: 485.425 / 650.625 / 650.825 / 850.825 / 850.1025 / 850.1280

CUSTOMER: Daeil Aqua Co., Ltd
LOCATION:
HORSEPOWER: 125 HP
RPM: 1785 rpm
MAX. CONTINUOUS TORQUE: LB-IN
PEAK OVERLOAD TORQUE: LB-IN
COUPLING MISALIGNMENT: 1°/ELEMENT
END FLOAT: ± INCH
COUPLING WEIGHT:
COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.		ADDAX, INC. LINCOLN, NE	
TOLERANCES:	XX = ±0.030	DRAWN:		LRR 485.425-SS	
FRACTIONS:	±1/16 XX = ±0.010	CHECK:			
ANGLES:	±1/2° XXX = ±0.005	GRP LDR:			
FINISHED SURFACES:	125 MICROINCHES	STRESS:			
REF:	MIL STD. 10	PROJ ENGR:		SIZE	CODE IDENT. NO.
WELDS:		PROG MGR:		A	
FILLET		QC ENGR:		DRAWING NO.	
REF:	AWS A.20-58	SAFETY:		PROJ	
BREAK ALL SHARP CORNERS 0.010		PROD MGR:		SCALE	SHEET OF