


REVISIONS				
REV	DESCRIPTION	DRAWN	APP.	APP.
NC	INIT. REL. PER ECO NO.			

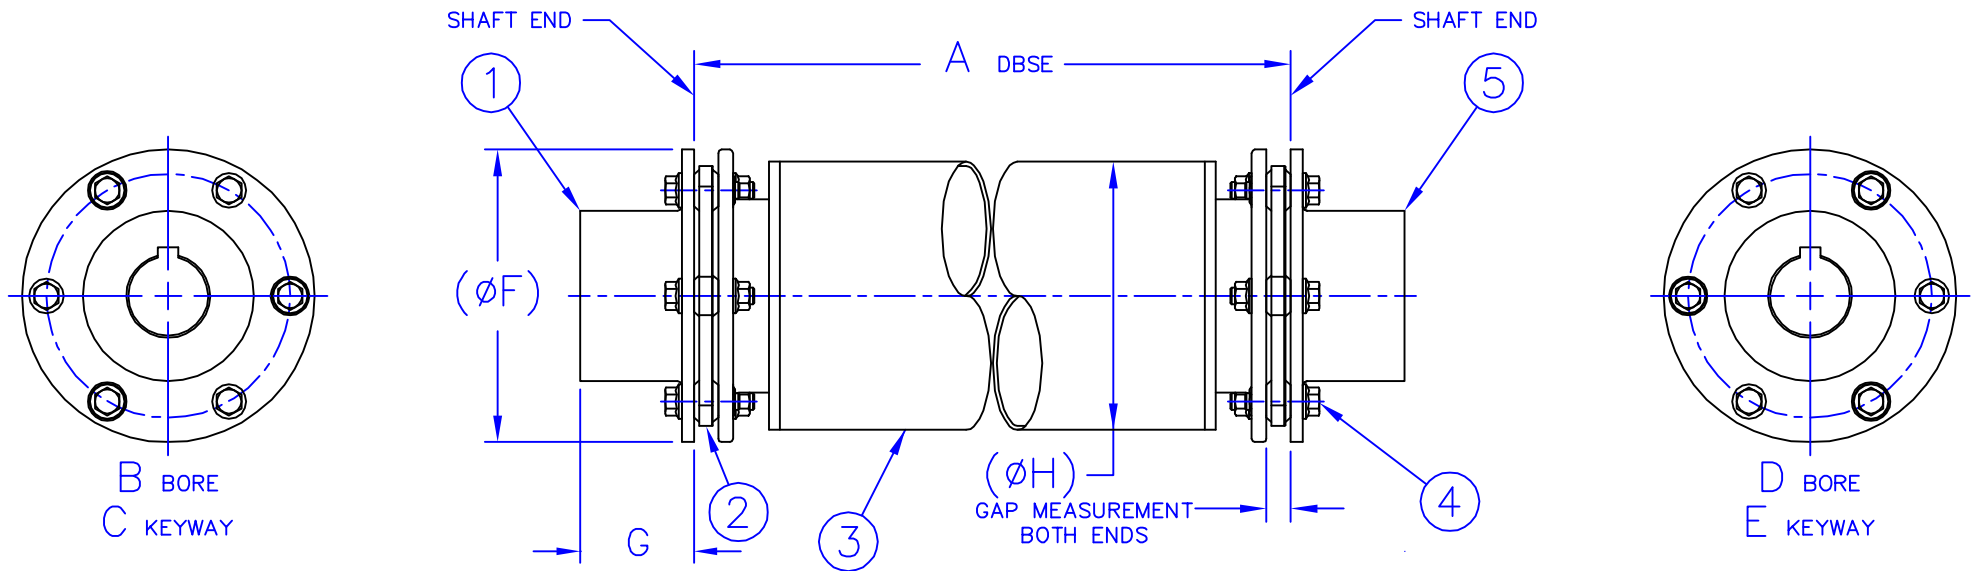

CODE	HDWR	MAT'L
M	MONEL	
S	316 S.S.	✓

FIGURE 1.

5	1	HUB
4	2	HARDWARE, KIT
3	1	SPACER
2	2	FLEX ELEMENT
1	1	HUB
DET. NO	QTY.	DESCRIPTION
BILL OF MATERIALS		

DIMENSIONS		
DBSE	A DBSE	4700 mm
MOTOR	B BORE	95 mm
	C KEYWAY	25 x 14 mm
GEAR	D BORE	2.936 Inch
	E KEYWAY	3/4 x 3/4 Inch
HUB	F HUB OD	9.00 Inch
	G LENGTH	3.31 Inch
	H TUBE OD	8.25 Inch

FIGURE 2.

Models: 485.425 / 650.625 / 650.825 / 850.825 / 850.1025 / 850.1280

CUSTOMER: I.T.C Co., Ltd

LOCATION:

HORSEPOWER: 250 HP

RPM: 1500 rpm

MAX. CONTINUOUS TORQUE:

LB-IN

PEAK OVERLOAD TORQUE:

LB-IN

COUPLING MISALIGNMENT: 1°/ELEMENT

END FLOAT: ± INCH

COUPLING WEIGHT:

COUPLING WR²:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	This document is the property of Addax Inc. It or its subject matter may not be used, reproduced or divulged without the written permission of Addax, Inc.	
TOLERANCES: X.X = ±0.030	DRAWN:	
FRACTIONS: ±1/16 X.XX = ±0.010	CHECK:	
ANGLES: ±1/2° X.XXX = ±0.005	GRP LDR:	
FINISHED SURFACES: 125 MICROINCHES	STRESS:	
REF: MIL STD. 10	PROJ ENGR:	
WELDS:	PROG MGR:	
FILLET	QC ENGR:	
REF: AWS A.20-58	SAFETY:	
BREAK ALL SHARP CORNERS 0.010	PROD MGR:	

ADDAX, INC. LINCOLN, NE

LRR 850.825-SS

SIZE	CODE IDENT. NO.	DRAWING NO.
A		
SCALE	PROJ	SHEET OF